




B2

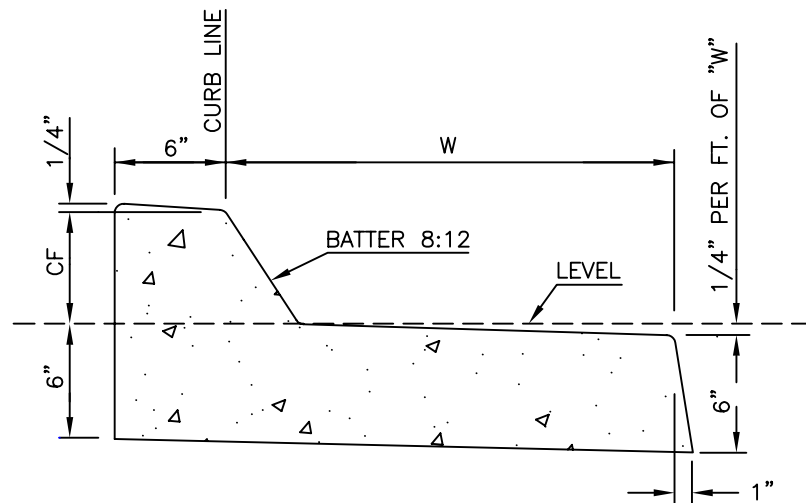

B3

GENERAL NOTES:

1. ALL DIMENSIONS ARE MEASURED IN INCHES.
2. "CF" IS 6" UNLESS OTHERWISE SPECIFIED.
3. "W" IS 12" UNLESS OTHERWISE SPECIFIED.
4. GRADE SHALL BE MEASURED AT CURB LINE AT TOP OF CURB.
5. WORKMANSHIP AND MATERIALS SHALL COMPLY WITH CITY SPECIFICATION FOR CONCRETE CURB, GUTTER AND SIDEWALK.
6. CURING - USE APPROVED CURING COMPOUND.
7. EXPANSION JOINTS - 3/8" FULL DEPTH PREMOLDED ASPHALT IMPREGNATED, EVENLY SPACED, NOT OVER 30' APART AT ALL CURB RETURNS, DRIVEWAY APRONS AND EXISTING WORK.
8. COLORING - USE 1 1/2 LBS. LAMPBLACK PER C.Y., INTEGRALLY MIXED.
9. FINISH - ALL EDGES, CORNERS AND ENDS SHALL HAVE 1/2" RADII.
10. SCORING - SEE STD. SPEC. FOR CONCRETE CURB, GUTTER AND SIDEWALK.
11. COMPACTION - RELATIVE DENSITY 90% UNDER SIDEWALKS. UNDER UNDER CURBS, GUTTERS AND DRIVEWAYS, 95%.

 RICHARD G. SWEET R.C.E. 44,213 EXP. 6/30/07		12/01/05 DATE			City of Santa Maria Standard Drawing	
REVISIONS		BY			APP	DATE
DRAWN BY: A.P.W.A.		DATE DRAWN: 1984		SCALE: NONE		SHEET 1 OF 1